

IMAGING WITH A 2 MHz SPARSE BROADBAND PLANAR ARRAY

John Impagliazzo, Michael Medeiros
Naval Undersea Warfare Center, Division
Newport, 1176 Howell Street, Newport, RI,
02841-1708,

Steven Kay
Signal Processing Systems, 89 River Run Rd,
Middletown, RI, 02842,

Abstract- A portable high-resolution sonar has been under development to provide Navy Divers with an acoustic imaging systems for mine reconnaissance. The first phase of development was completed in 2000 with the demonstration of a broadband, 6% sparse line array, imaging a simple target in the NUWC Acoustic Test Facility (ATF). Element locations for this array were computed based on a grid point optimization technique¹ which minimized close-in sidelobes. The center frequency was 2 MHz with a 667 kHz bandwidth. A new sparse planar array, consisting of 121 1 mm x 1 mm 2 MHz elements, has been fabricated, to provide 3-D acoustic images of underwater targets. This array was also designed using the grid point optimization technique.¹ The first phase of testing with simple targets will be completed in 2001 for the planar sparse array.

I. INTRODUCTION

For undersea acoustic minefield reconnaissance and mine hunting by divers, a handheld, low cost sonar system is needed. To achieve these goals, a high-resolution, three-dimensional sonar imaging system based on a large-area electronically steerable two-dimensional sparse array is being designed and built by Teratech Corporation of Burlington, MA. The system will provide continuous real-time scanned images throughout a 20° field of view. The processing requirements are to provide image updates at a rate of four frames per second. The resolution of an imaging sonar in azimuth and elevation is directly proportional to its aperture in wavelengths. The overall goal of this effort is to develop an acoustic system capable of imaging with 2 cm³ resolution at a range of 3 meters.

II. PROTOTYPE ONE DIMENSIONAL ARRAY

A 20 cm. one dimensional sparse array was designed using the approach in Kay (2). It was fabricated by Tetrad Corp, Englewood, CO and tested in the NUWC Acoustic Test Facility. The array was 264 elements across, with a pitch of .781 mm. From this array, 32 elements were active.

Fig. 1 shows the predicted receive response for a 2 MHz array, designed for a 667 kHz FM slide waveform. Fig. 2 shows the measured near-field beampattern for a source at 3 meters for the prototype array as obtained in the NUWC Acoustic Test Facility. The transmit pulse was the FM slide with a 50 microsecond pulse width. The free-field voltage sensitivities of the individual active elements were measured at approximately -250 dB //V/ μ Pa over the frequencies of interest. The first sidelobes were typically 18 dB down. The average source level over the bandwidth of the fm slide was 192 dB // μ Pa.

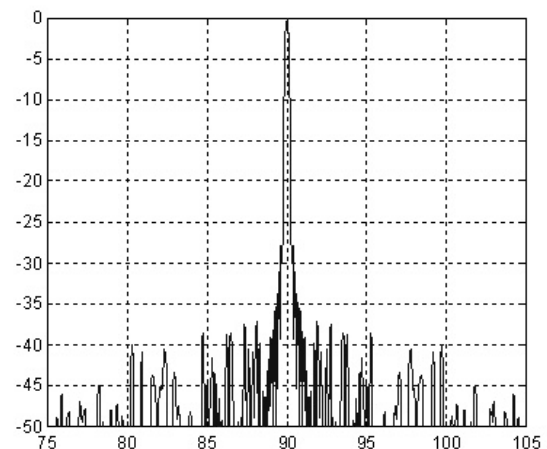


Fig. 1. Predicted beampattern for 20 cm. one dimensional array.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 2001		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Imaging With A 2 Mhz Sparse Broadband Planar Array				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Undersea Warfare Center, Division Newport, 1176 Howell Street, Newport, RI, 02841-1708,				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES 2001 Oceans Conference, Honolulu, Hawaii, The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

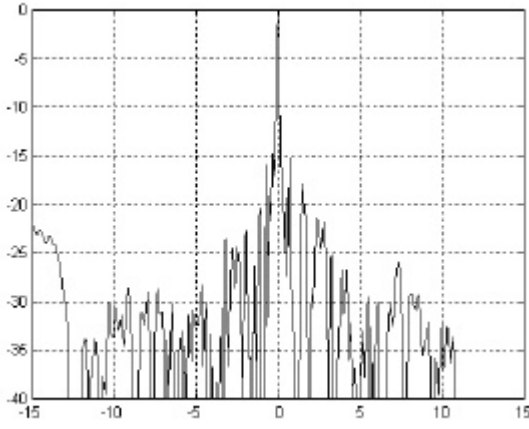


Fig. 2. Measured beam pattern for prototype one dimensional array.

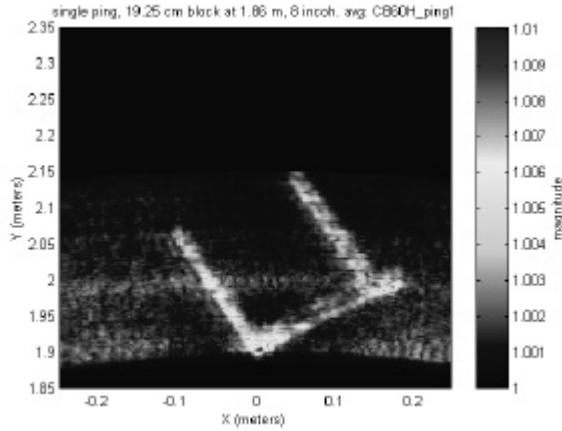


Fig.3. Acoustic image of cinder block suspended vertically in the Acoustic Test Facility. The array is at the bottom looking up along the y axis .

Experiments were conducted in the NUWC ATF to image various targets with the 32 element sparse line array. The targets were illuminated with a bistatic projector mounted 25 cm below the center of the array, perpendicular to the line of the array with a source level of 192 db // mPa at a range of 1.86 meters. Simple targets consisted of a 10 cm. stainless steel sphere and a 23 x 36 x 0.6 cm aluminum plate. A 19 x 19 x 40 cm. cinder block was submerged to provide an interesting and more complex target. The dynamic range of the peak target highlights was approximately 40dB. This was observed when comparing the level of the peak specular highlight from the

aluminum plate at broadside with that of the plate rotated 45 degrees. Fig. 3 show an example image from the cinder block at a 60 degree orientation, with optimized shading. The image dimensions are 0.5 m. x 0.5 m. The projector is located at bottom looking up. In this visual, three sides of the block appear to be imaged. The two solid cinder block walls are the thicker parallel sides. The voids are ported on the remaining face and allow the far wall to be imaged.

The experimental setup is shown in Fig. 4.

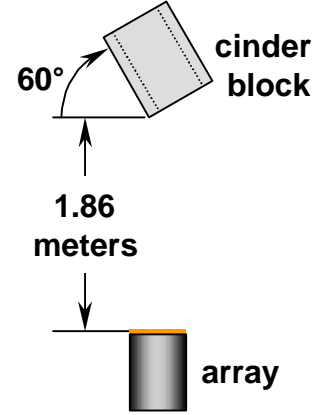


Fig. 4. Physical arrangement of sparse linear array and cinder block target.

III. MATCHED FILTERED PROCESSING

The response of the array was computed as the square of the matched filtered output as derived by Kay (2). The target was illuminated with an FM slide of bandwidth $W = 667$ kHz and center frequency $F_0 = 2$ MHz. The power at the beamformer /matched filter output for a signal arriving from an angle $\mathbf{q}_x, \mathbf{q}_y$ is therefore

$$B(\mathbf{q}_x, \mathbf{q}_y) = \left(\frac{1}{M^2} \sum_{i=0}^{M^2-1} w_i \cos(2\pi F_0 \tau_i) \frac{\sin(\pi \tau_i W)}{\pi \tau_i W} \right)^2 \quad (1)$$

where τ_i is the time delay to the i th sensor, w_i is the weight applied to the i th element and M is the number of sensors in each dimension. The i th sensor is located at $\mathbf{r}_i = (x_i, y_i)$, \mathbf{u} is the unit

vector in the direction of propagation and c is the speed of sound.

$$\mathbf{t}_i = \frac{\mathbf{u}^T \mathbf{r}_i}{c} = -\frac{1}{c}(x_i \cos \mathbf{q}_x + y_i \cos \mathbf{q}_y) \quad (2)$$

IV. PLANAR ARRAY

A second generation of transducer elements was designed for the planar array. These elements were constructed in bricks of 3 x 3 and 3 x 6 elements, different from the first generation array where the entire array was formed from only three bricks. The element size was also increased to 1 mm x 1 mm to improve producibility of the devices. A new 2D composite structure was developed with improved sensitivity and bandwidth as compared to the first generation elements developed for the sparse line array. The challenge was to build a 2D structure with wavelength size elements that radiated with wide bandwidth without a strong coupling to adjacent elements. Typically, medical arrays have only one dimension at wavelength size. With both the x and y dimensions being of the same order of magnitude as the wavelength, the structure supported more undesirable modes which degraded the overall device performance. Two matching layers with the ceramic were required to achieve 50% bandwidth and isolation cuts were made between all elements to reduce coupling. Finite element analysis (FEA) was used to guide the changes for the design of the second generation elements. The FEA modeled a 3 x 3 grid of elements; each element consisted of a 2 x 2 grid of columns. A partial array was fabricated with 9 second generation elements. The free-field voltage sensitivities of the individual active elements were measured at approximately -220 dB //V/ μ Pa with a 50% bandwidth.

A sparse planar array with 121 elements has since been fabricated and is currently in testing. Horizontal and vertical nearfield beampatterns are being measured for the 121-element array and plans are to image the cinder block and a simulated manta mine at various orientation angles. Element data is being collected at a

sample rate of 5 MHz. Simulation results for sparse array beampattern for data acquired at 5 MHz is shown in Fig. 5.

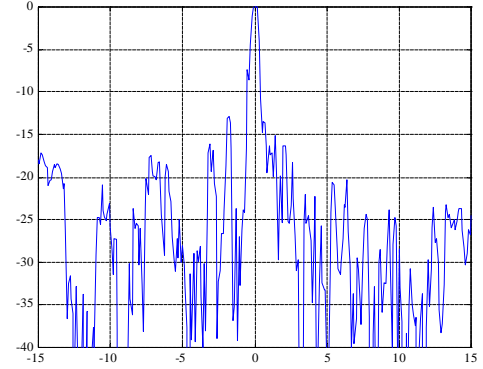


Fig. 5. Simulated azimuth beampattern, at 5 MHz sampling rate, for sparse planar array.

In comparison, first measurements of these data are shown in Fig. 6. For both cases, the array response is computed from -15 to +15 degrees in increments of 0.1 degrees. The vertical axis range is 0 to -40 dB.

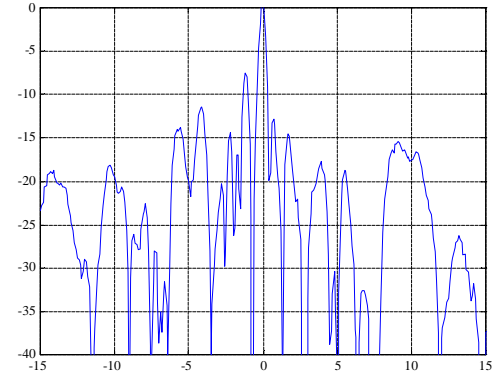


Fig. 6. Measured azimuth beampattern for sparse planar array in ATF at 5 MHz sampling rate.

The cinder block imaged with the 1D array was also imaged with the sparse planar array. The physical arrangement of the array and block is shown in Fig. 7. The computed image of the block is shown in Fig. 8.

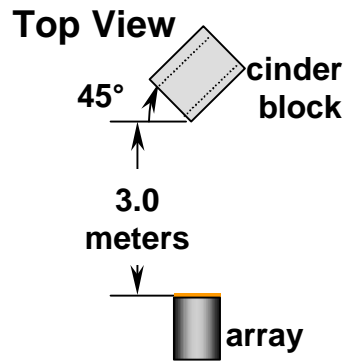


Fig. 7. Physical arrangement of sparse planar array and cinder block target.

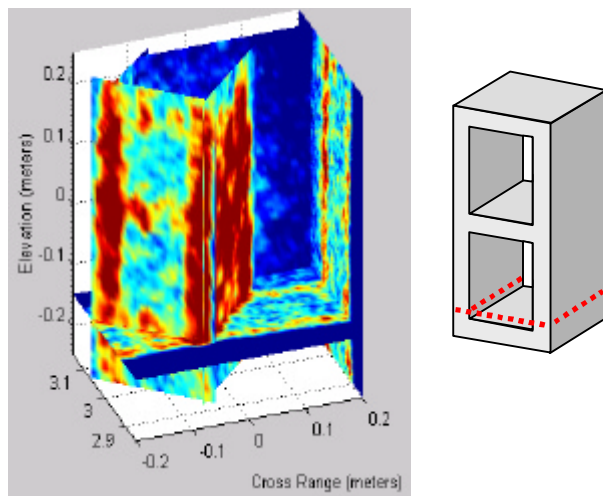


Fig. 8. Computed image of the cinder block.

The volume imaged is 0.5 m in elevation, 0.4 m. in azimuth and 0.3 m. in depth. For these data, 0.5 cm^3 voxels were computed to form the image. The transmit pulse was the FM slide with a 50 microsecond pulse width.

V. RESULTS AND CONCLUSION

The results shown in Fig. 8 are the first results obtained for this array and hardware configuration. A large variance was observed in the element to element sensitivity and the problem is carefully being investigated. Improved performance is expected once these problems are resolved and shading the array will be investigated. Progress will be reported

at the conference later this year. Overall, the results obtain with a 0.1% sparse planar array are encouraging.

Acknowledgments

This project was sponsored by the Defense Applied Research Project Agency, Advanced Technology Office, Arlington, VA, USA, Dr. Theo Kooij, Program Manager.

REFERENCES

- [1] J. Impagliazzo, Naval Undersea Warfare Ctr., S. Kay, Signal Processing Systems, "Grid-Point Optimization Technique for Broadband Sparse Array Design," UDT Europe 2000," Wembley Conference & Exhibition Centre, London, UK, 27-29 June 2000.
- [2] Steven Kay, S. Saha, "Design of Sparse Arrays for Broadband Signals," submitted to *IEEE Transactions on Signal Processing*, 1999.
- [3] Alice M. Chiang, "Low-Power Hybrid Electronics," *IEEE Solid-State Circuits and Technology Committee Workshop on Low-Power Electronics*, 1993.
- [4] Kim C. Benjamin, "The Development of a Very Large, Dense Packed, Two Dimensional, Ultrasonic Imaging Array," *Acoustical Imaging*, Volume 23. April 1997.
- [5] Bernard D. Steinberg, *Principles of Aperture and Array System Design*, John Wiley & Sons, New York, 1976.
- [6] Steven Kay, S. Saha, "Synthesis of Optimal Broadband Beampatterns," *Signal Processing Systems report*, Oct. 27, 1998.
- [7] DA Pierre, *Optimization Theory with Applications*, Dover Pub., New York, 1986
- [8] Y. Bard, *Nonlinear Parameter Estimation*, Academic Press, New York, 1974.
- [9] Donald L. Folds, Ultra-Acoustics, Inc., Woodstock, GA, Private communication to NUWC, March 3, 1999.